




C-55 Installation Instructions

GROSS LOAD CAPACITY
30,000 lbs. Gross Trailer Weight
DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY!

- (1) **Flat Plate** (48" long) is to be bolted directly to truck frame. Spacers should be installed between truck frame and bed floor at each mounting location.
- (2) **When** exceeding 20,000 GTW, a bed floor support should be fabricated and installed to prevent the bed floor from collapsing.
- (3) Hardware not included
- (4) Mounting holes must be drilled by installer. (Eight holes recommended, four per side)

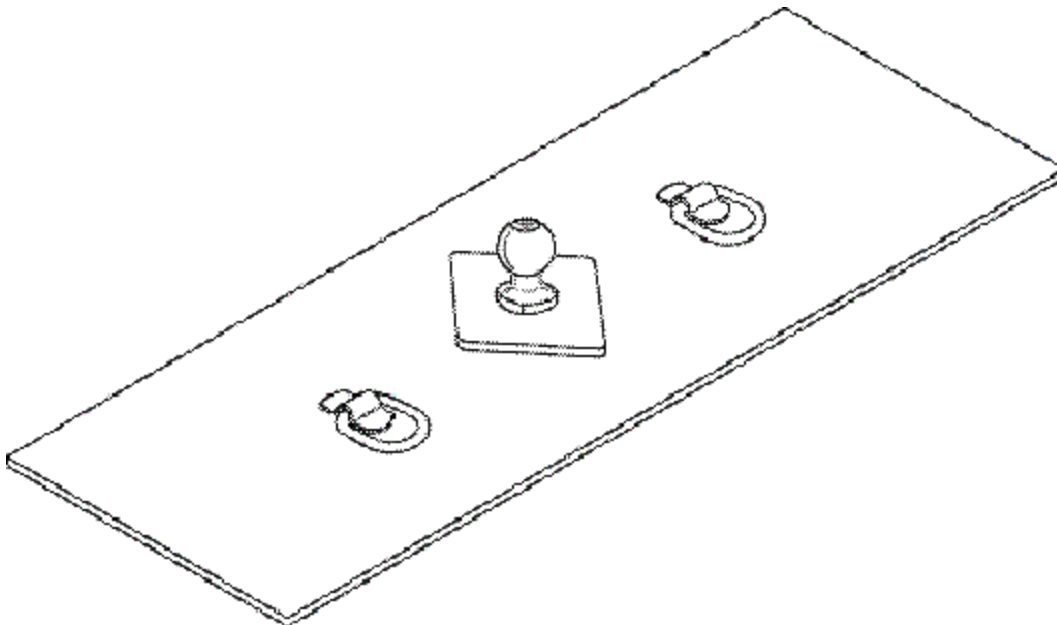

Curt Manufacturing Inc. warrants this product to be free of defects on material or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of product voids this warrant. Curt Manufacturing Inc's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.